


P10768J150I_X01

(X can be defined as N/T/P; N=No Touch/T=Resistive Touch/P=Pcap Touch)

15.0 Inches, 1024xRGBx768, 65K Colors

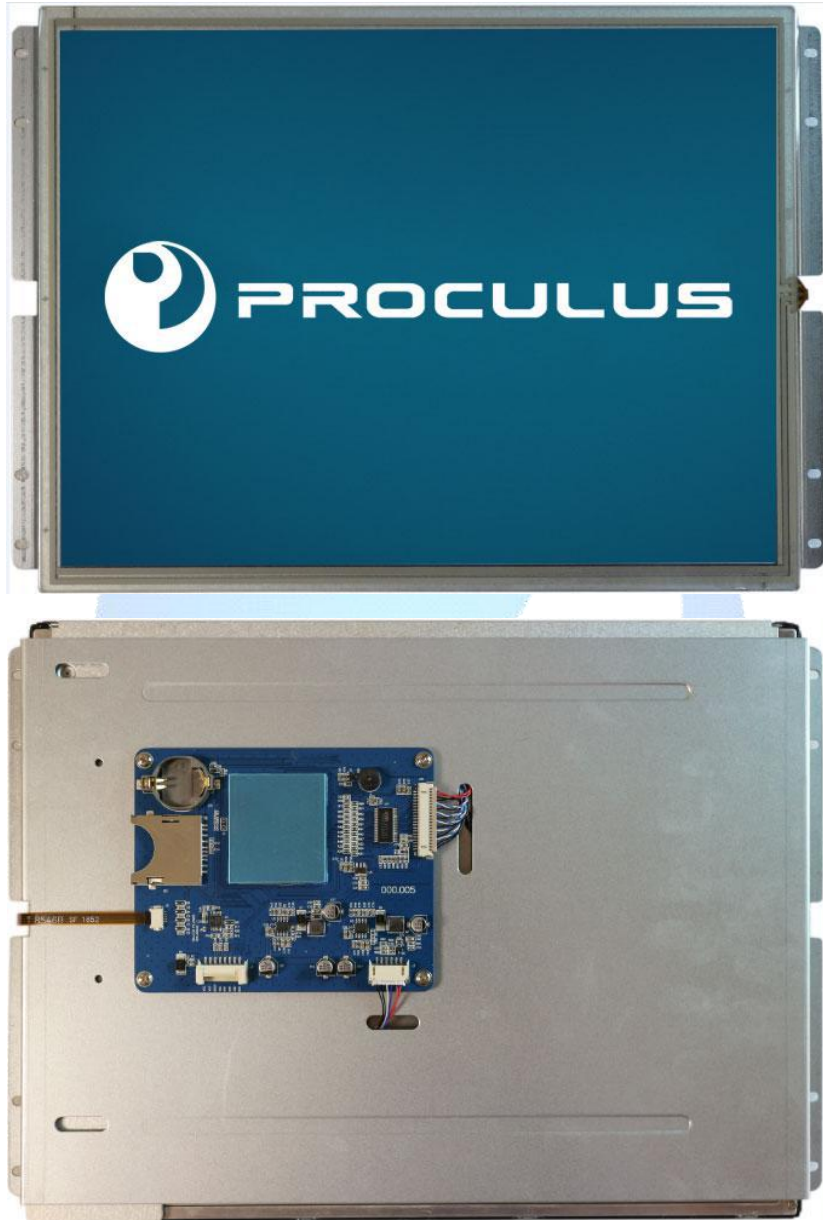

Modification Record

Date	Content
2016/11/01	First release

Features

- Support RS232/TTL/CMOS, the max baud rate is 921600bps;
- Support hardware JPG decoding which makes storage more efficient and display quicker;
- Support offline batch download through USB Flash Drive, which improves download efficiency and reduce requirements for operators;
- Support backlight brightness adjustment and automatic standby screen saver function;
- Support multi-language font library, picture, TWO-DIMENSIONAL code display;
- Support number and English input, customizable keyboard interface;
- Support 90 degrees, 180 degrees, 270 degrees screen rotation, adjustable visual angle;
- Easy-to-use UnicView GUIs Development, no coding skills required;
- Instant operation when power on without system load time;
- Excellent electromagnetic compatibility characteristics.

Display

Color	65K (65536) colors, 16 bit color 5R6G5B
ACTIVE AREA / View Area	304.1mm(width)×227.3mm(height)/307.4 mm(width)×231.3mm(height)
Resolution	1024*768, 90° rotated display (768*1024)
Backlight /Lifecycle/Brightness	LED/20,000 HOURS/ 400 cd/m ² / (64 level adjustment)
Working Temperature	-20~+70°C/-30~+85°C

Voltage & Current

Item	Condition	Min.	Typ.	Max.	Unit
Power Voltage		-	12	26	V
Operation Current	VIN = 12V, Backlight on	-	950	-	mA
	VIN = 12V, Backlight off	-	180	-	mA

Recommended Power Supply: 12V 2A DC

Reliability Test

Item	Condition	Min.	Typ.	Max.	Unit
Working Temperature	60%RH at 12V voltage	-20	25	70	°C
Storage Temperature	-	-30	25	85	°C
Working Humidity	25°C	10%	60%	90%	RH
Protective Paint	-	-	None	-	-
Aging Test	-	-	8	-	H

Interface					
Item	Condition	Min.	Typ.	Max.	Unit
Baud Rate	Standard	1200	115200	921600	bps
	User Defined	1200	-	921600	bps
Output Voltage (TXD、BUSY)	Output 1,lout=1mA	3.0	3.2	-	V
	Output 0,lout=-1mA	-	0.1	0.2	V
Input Voltage (RXD)	Input 1,lin=1mA	2.0	3.3	15.0	V
	Input 0,lin=-1mA	-15.0	0.0	0.3	V
Interface	Mode is determined by Jumper6: ON = 8N1, 3.3V TTL/CMOS; OFF = 8N1, RS232				
Socket	HY2.0-8P				
USB	Reserved (If needed, please contact our sales representative.)				
SD slot	Yes (SD/SDHC, FAT32 file format)				
Memory					
Item	Parameter	Min	Typ.	Max	Unit
Flash	Space of Font	-	32	-	MB
	Picture Storage (256MB)	-	-	143	Pcs
	Picture Storage (1GB)	-	-	635	Pcs
	User' s Storage	0	-	32	MB
Peripherals					
Buzzer	Yes				
RTC	Yes				
Resistive touch screen	Yes				
SD card	Yes				
Model number					
P10768J150I_N01	No Touch				
P10768J150I_T01	Resistive Touch				
P10768J150I_P01	Pcap Touch				
Packaging and physical dimensions					
Parameter	Data				
Dimensions	326.5(width) ×253.5(height) ×27.0(thickness with TP) mm				
Net weight of single piece	2100g				
Weight of whole case	TBD				
Packing box size	460mm(L)×375mm(W)×480mm (H)				
Packing specification	8 pieces /box				

Immunity Test

ESD test for electrostatic discharge

Test ambient temperature: 25°C

Test ambient humidity: 50%

Test process: Carry out contact and air discharge on the periphery of the iron frame and the display area of the serial port screen in turn, and observe whether the screen has abnormal working phenomena such as reset restart, black screen, white screen, communication interruption, and other abnormalities.

Discharge type	Discharge value	Result
Contact discharge	±6KV	Working properly.
Air discharge	±15KV	Working properly.

Note: All tests are conducted when the products are exposed. In the actual use process, when the serial port screen is assembled on the user equipment, the screen and the equipment are kept well-grounded, the ESD performance of the whole machine will be better.


EFT Test

Test ambient temperature: 25°C


Test ambient humidity: 50%

Test process: The power supply line supplies power to the screen through the power supply after the pulse Group generator is coupled with the pulse Group; the serial port signal line carries out serial port communication with the screen through the signal after the pulse Group generator is coupled with the pulse Group; and the screen is observed whether abnormal working phenomena such as reset restart, black screen, white screen, abnormal communication, and communication interruption.

Test item	Test standard		Result
	Voltage	Frequency	
Power cord	4 KV	100 KHz	Working properly.
Signal line	2 KV	100 KHz	Working properly.

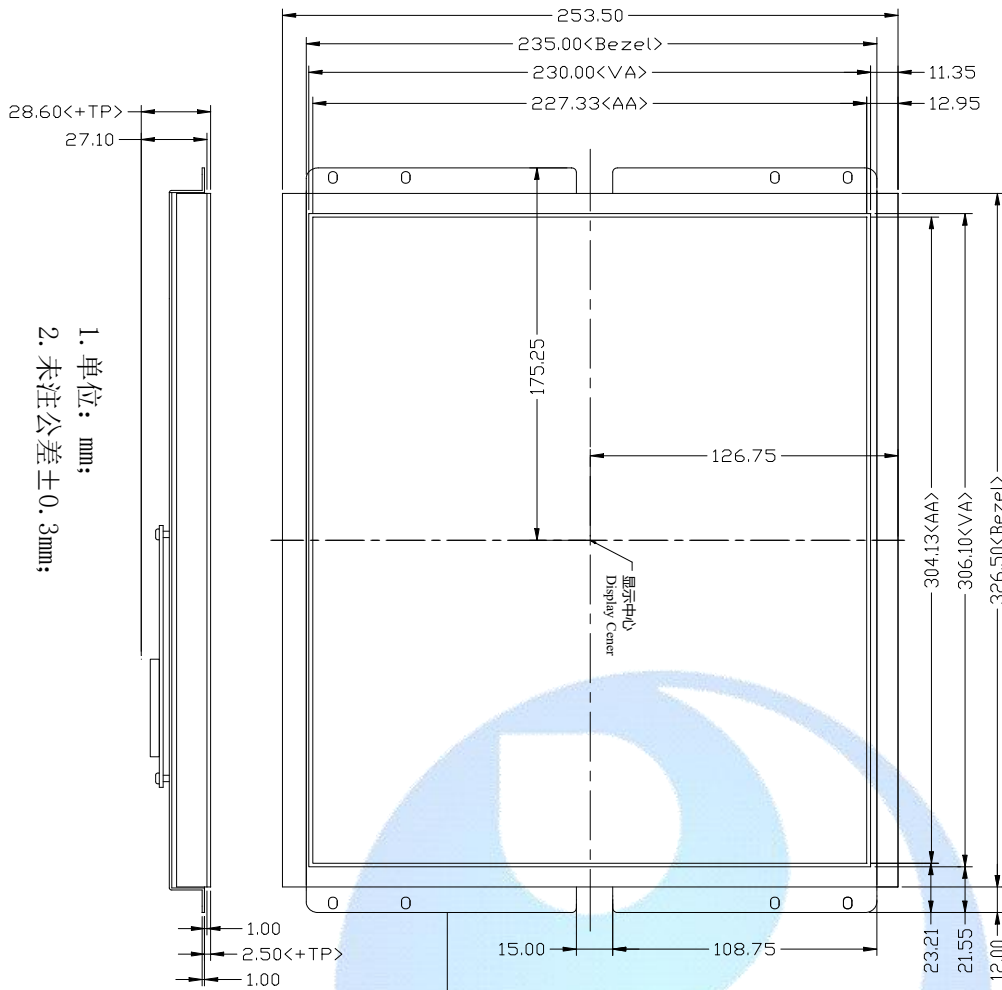

1. 单位: mm;
2. 未注公差±0.3mm;

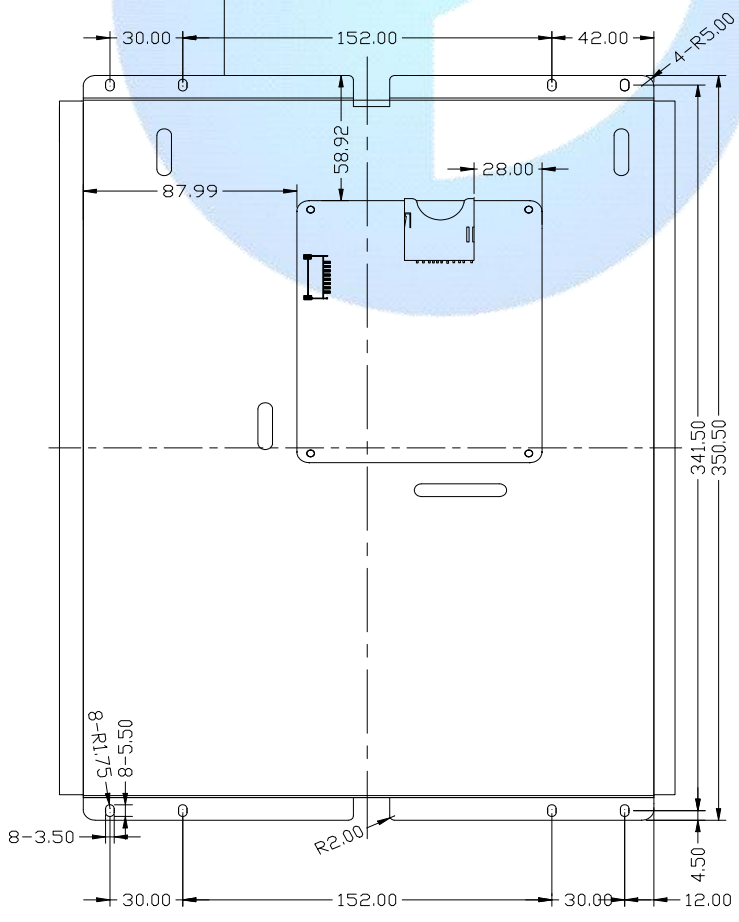

引脚编号	引脚名称	引脚类型	说明
1,2	VIN	P	电源输入/Power input
3	BISY	OUT	串口缓冲区满信号指示
4	DOUT	OUT	RS232/TTL数据输出, RS485-
5,6	DIN	IN	RS232/TTL数据输入, RS485+
7,8	GND	P	公共地/GND