


P80600J80C_X01

(X can be defined as N/T/P; N=No Touch/T=Resistive Touch/P=Pcap Touch)

8.0 Inches, 800xRGBx600, 65K Colors

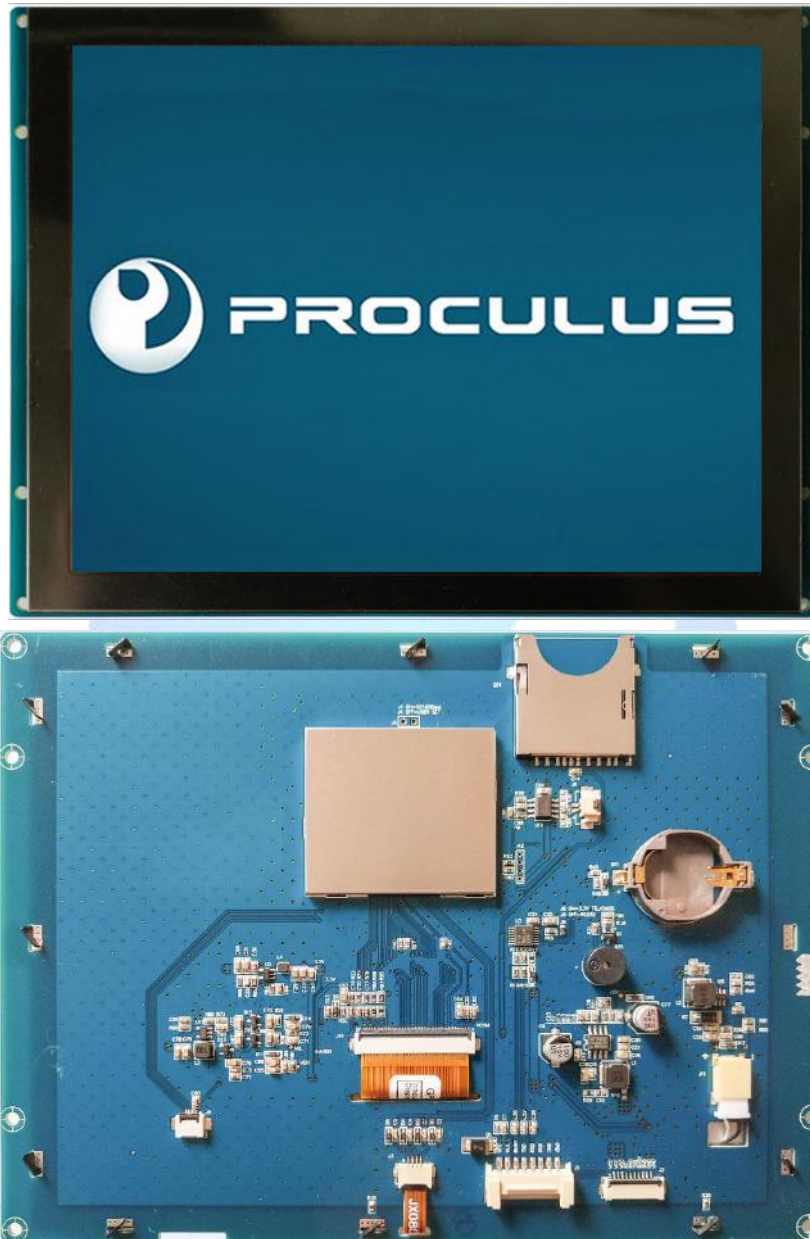

Modification Record

Date	Content
2016/09/05	First release
2018/04/19	Audio interface added

Features

- Support RS232/TTL/CMOS, the max baud rate is 921600bps;
- Support audio
- Support hardware JPG decoding which makes storage more efficient and display quicker;
- Support offline batch download through USB Flash Drive, which improves download efficiency and reduce requirements for operators;
- Support backlight brightness adjustment and automatic standby screen saver function;
- Support multi-language font library, picture, TWO-DIMENSIONAL code display;
- Support number and English input, customizable keyboard interface;
- Support 90 degrees, 180 degrees, 270 degrees screen rotation, adjustable visual angle;
- Easy-to-use UnicView GUIs Development, no coding skills required;
- Instant operation when power on without system load time;
- Excellent electromagnetic compatibility characteristics.

Display					
Color	65K (65536) colors, 16 bit color 5R6G5B				
ACTIVE AREA / View Area	162.0mm(width)×121.5mm(height)/164.8 mm(width)×124.3 mm(height)				
Resolution	800*600, 90° rotated display (600*800)				
Backlight /Lifecycle/Brightness	LED/20,000 HOURS/ 300 cd/m²/ (64 level adjustment)				
Working Temperature	-10~+60℃/-30~+85℃				
Voltage & Current					
Item	Condition	Min.	Typ.	Max.	Unit
Power Voltage		—	12	—	V
Operation Current	VIN = 12V, Backlight on	—	330	—	mA
	VIN = 12V, Backlight off	—	160	—	mA
Recommended Power Supply: 12V 1A DC					
Reliability Test					
Item	Condition	Min.	Typ.	Max.	Unit
Working Temperature	60%RH at 12V voltage	-10	25	60	℃
Storage Temperature	-	-30	25	85	℃
Working Humidity	25℃	10%	60%	90%	RH
Protective Paint	-	-	None	-	-

Aging Test	-	-	8	-	H
Interface					
Item	Condition	Min.	Typ.	Max.	Unit
Baud Rate	Standard	1200	115200	921600	bps
	User Defined	1200	-	921600	bps
Output Voltage (TXD、BUSY)	Output 1,Iout=1mA	3.0	3.2	-	V
	Output 0,Iout=-1mA	-	0.1	0.2	V
Input Voltage (RXD)	Input 1,Iin=1mA	2.0	3.3	15.0	V
	Input 0,Iin=-1mA	-15.0	0.0	0.3	V
Interface	Mode is determined by Jumper6: ON = 8N1, 3.3V TTL/CMOS; OFF = 8N1, RS232				
Socket	HY2.0-8P/10pin,1.0mm FFC				
USB	Reserved (If needed, please contact our sales representative.)				
SD slot	Yes (SD/SDHC, FAT32 file format)				
Memory					
Item	Parameter	Min	Typ.	Max	Unit
Flash	Space of Font	-	32	-	MB
	Picture Storage (128MB)	-	-	93	Pcs
	Picture Storage (256MB)	-	-	215	Pcs
	Picture Storage (1GB)	-	-	932	Pcs
	User’ s Storage	0	-	32	MB
Peripherals					
Buzzer	Yes				
RTC	Yes				
Resistive touch screen	Yes				
SD Card	Yes				
Audio	Yes				
Model number					
P80600J80C_N01	No Touch				
P80600J80C_T01	Resistive Touch				
P80600J80C_P01	Pcap Touch				
Packaging and physical dimensions					
Parameter	Data				
Dimensions	199.4(width) ×148.8(height) ×17.8(thickness without TP) / 20.2(thickness with TP) mm				
Net weight of single piece	TBD				
Weight of whole case	TBD				
Packing box size	395mm(L)×330mm(W)×230mm (H)				

Packing specification	20 pieces /box
------------------------------	----------------



